



Features:

- Constant Current output with multiple levels selectable by dip switch
- 0-10V and 1/10V Dimming Control
- Universal 100-277VAC Input
- Built-in active PFC function
- Efficiency up to 81%
- Protections: Short circuit/ Over load/ Over temperature
- Cooling by free air convection

Models

ELED-20-C250/700V

Output Specifications

	700mA	600mA	550mA	500mA	450mA	400mA	350mA	250mA
Rated Current	TTT	TTT	TTT	TTT	TTT	TTT	TTT	TTT
Voltage Tolerance	± 3%							
Output Voltage	3-29V	3-33V	3-36V	3-40V	3-42V	3-42V	3-42V	3-42V
Rated power	20.3W	19.8W	19.8W	20W	18.9W	16.8W	14.7W	10.5W

Input Specifications

Voltage Range	100-277VAC							
Frequency Range	47-63Hz							
Inrush Current	27A (Twidth=184μs 230VAC)							
Power Factor (Typ.)	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Full Load Efficiency (Typ.)	81%	81%	81%	81%	81%	81%	81%	81%
AC Current (Typ.)	0.3A							
Leakage Current	<0.50mA/220VAC							

Protection

Short Circuit	Hiccup mode, recovers automatically after fault condition is removed
Over Load	≤120%
Over Current	≤1.4*I out
Protection Class	II

Environment

Working Temperature	-40~+80°C (Refer to derating curve)
Working Humidity	20-90% RH, non-condensing
Storage Temperature, Humidity	-40~+80°C, 10-95% RH

Environment

Temperature Coefficient	$\pm 0.03\%/^{\circ}\text{C}$ (0-50°C)
Vibration	10-500Hz, 2G 12min./ 1 cycle, period for 60min.each along X, Y, Z axes

Safety & EMC


Safety standards	EN61347-1, EN61347-2-13, UL8750
Withstand voltage	I/P-O/P:3.75KVAC
Isolation resistance	I/P-O/P:100M Ω /500VDC/25°C/70%RH
EMC Emission	Compliance to EN55015, EN61000-3-2,3 ($\geq 50\%$ load), FCC Part 15B
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,11, EN61547, A light industry level (surge 4KV)

Other Specifications

Weight	0.15 kg
Size	159.5 x 43 x 20 mm
Packing	320 x 280 x 215 mm (50PCS/CTN)

Mechanical Specifications

SP2

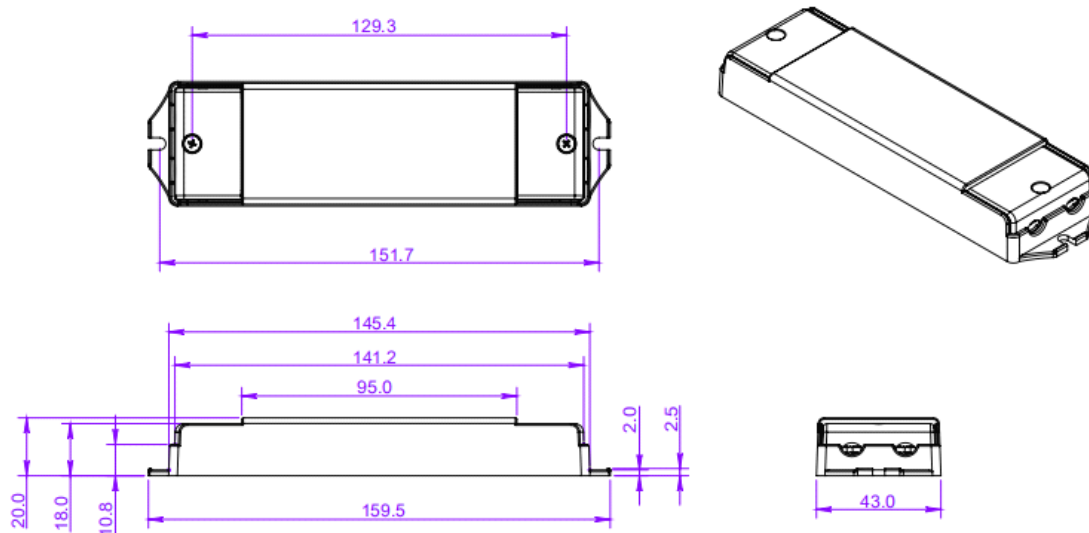

※Suggested wire diameter: Input 0.75-2mm²; Output:0.5-2mm².

※Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.

※Note: Any other requests we can customized.