

## **ELED-20-C250/700V**

20 Watt 0-10V and 1-10V Dimmable Constant Current LED Driver



## **Features:**

- Constant Current output with multiple levels selectable by dip switch
- 0-10V and 1/10V Dimming Control
- Universal 100-277VAC Input
- Built-in active PFC function
- Efficiency up to 81%
- Protections: Short circuit/ Over load/ Over temperature
- Cooling by free air convection

















ELED-20-C250/70	

	ELED-20-C250/700V								
Output Specifications									
Rated Current	700mA	600mA <b>4TT</b>	550mA	500mA <b>₹</b> ₹4	450mA	400mA	350mA	250m <i>A</i>	
Voltage Tolerance	± 3%								
Output Voltage	3-29V	3-33V	3-36V	3-40V	3-42V	3-42V	3-42V	3-42V	
Rated power	20.3W	19.8W	19.8W	20W	18.9W	16.8W	14.7W	10.5W	
Input Specifications									
Voltage Range	100-277VAC								
Frequency Range	47-63Hz								
Inrush Current	27Α (Twidth=184μs 230VAC)								
Power Factor (Typ.)	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	
Full Load Efficiency (Typ.)	81%	81%	81%	81%	81%	81%	81%	81%	
AC Current (Typ.)	0.3A								
Leakage Current	<0.50mA/220VAC								
Protection									
Short Circuit	Hiccup mode, recovers automatically after fault condition is removed								
Over Load	≤120%								
Over Current	≤1.4*I out								
Protection Class	II								
Environment									
Working Temperature	-40~+80°C (Refer to derating curve)								
Working Humidity	20-90% RH, non-condensing								
Storage Temperature, Humidity	-40~+80°C, 10-95% RH								






## **ELED-20-C250/700V**

20 Watt 0-10V and 1-10V Dimmable Constant Current LED Driver

Environment						
Temperature Coefficient	±0.03%/°C (0-50°C)					
Vibration	10-500Hz, 2G 12min./ 1 cycle, period for 60min.each along X, Y, Z axes					
Safety & EMC						
Safety standards	EN61347-1, EN61347-2-13, UL8750					
Withstand voltage	I/P-O/P:3.75KVAC					
Isolation resistance	I/P-O/P:100MΩ/500VDC/25°C/70%RH					
EMC Emission	Compliance to EN55015, EN61000-3-2,3 (≥50% load), FCC Part 15B					
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,11, EN61547, A light industry level (surge 4KV)					
Other Specifications						
Weight	0.15 kg					
Size	159.5 x 43 x 20 mm					
Packing	320 x 280 x 215 mm (50PCS/CTN)					

## SP2

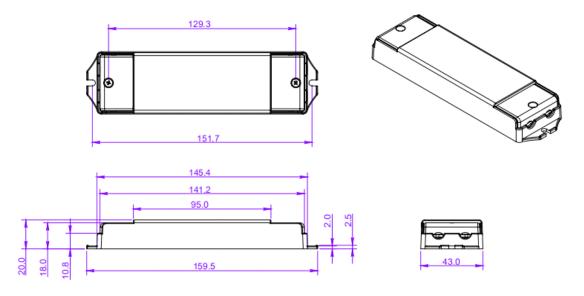

- \*\*Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.
- $\fint \fint \fin$

